
BOOM LIGHTING PROFILE WITH LED STRIP

For series INDUSTRIAL - series S

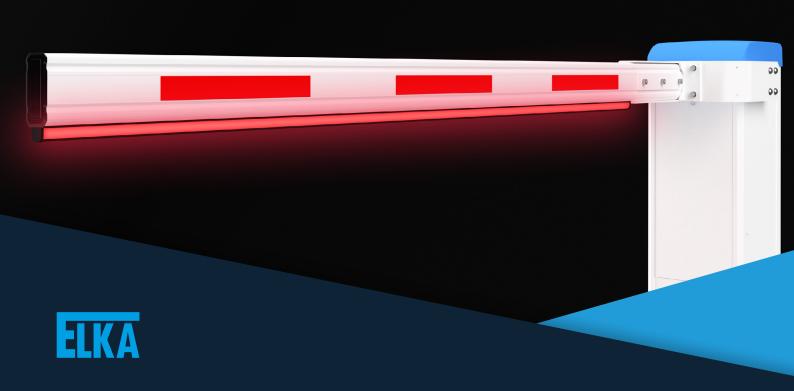

Boom lighting profile with LED strip for boom length up to 8,000mm

The translucent rubber profile is evenly illuminated over the entire length by red, green or blue LED lights. The lighting type (permanent or flashing) can be set on the controller MO 24. The visibility of the barrier boom is significantly increased in darkness, poor visibility conditions and during the day. Operated with the appropriate running speed, barriers equipped with this new lighting profile comply with the permissible forces at the barrier boom (according to DIN EN 13241). The boom lighting profile can be used with fixed and swinging supports.*

- ✓ Evenly illumination of the entire boom length
- ✓ Translucent rubber profile
- ✓ Visible from both sides
- Multi-colour light (red / green / blue possible)
- ✓ LED technology with low power consumption
- Protection class IP 68
 (when preassembled ex works ELKA)

- ✓ Up to a barrier boom length of 6,000mm pre-assembled ex works (complete barrier)
- Up to a barrier boom length of 8,000mm for on-site assembly (incl. insertion tool)
- Can be shortened as required
- ✓ Mounted ex works or available as retrofit kit.
- ✓ Easy to install
- Can be used with fixed and swinging supports

The lighting is freely configurable via the barrier controller MO 24. Example: Barrier closed = red, barrier in motion = flashes red, barrier open = green.

^{*}Not usable with folding skirts or folding top- and bottom skirts



ELKA-Torantriebe GmbH u. Co. Betriebs KG Dithmarscher Str. 9, 25832 Tönning / Germany

✓ info@elka.eu

49(0)4861-9690-0